

# RFX GATEWAY™

## Operating Instructions

### Getting Started:

RFX GATEWAY comes partially charged but we recommend fully charging your RFX GATEWAY before first use. However, you can set it up and use it while it is plugged in and charging. Download ThermoWorks App from the App Store or Google Play. Make sure your smart device's Bluetooth is turned on. This is necessary for sending your Wi-Fi credentials. Once logged into the app, click on +Device on the bottom right of the devices screen and follow the in-app instructions to attach your RFX GATEWAY to your account.

### What's included:

RFX GATEWAY, Pro-Series Air Probe, grate clip, USB A-to-C charging cable and adapter, silicone probe rings, and this instruction card. Calibration certificate can be downloaded from ThermoWorks App.

### Charging:

For fast charging, use the included USB A-to-C charging cable and adapter. RFX GATEWAY will not charge with a USB-PD or C-to-C cable. RFX GATEWAY should charge fully in approximately 4 hours with 5V and approximately 12 hours with 12V charging. You may also use our 12V Battery Bank, however it will not be fast charging due to the specific design of the charging circuitry. Battery life is approximately 24 hours unplugged. You can permanently power your RFX GATEWAY with the included 5V adapter and USB-C cable.

### Tips for Use:

When setting up RFX GATEWAY, please make sure the antenna is always vertical, see below for options:



The body of your RFX GATEWAY should not be affixed directly to a hot smoker or grill's hood—nor should it be placed inside a smoker or oven. The high heat will melt the plastic housing. You may attach it to a surface that does not become hot, like a pellet hopper.

The air probe cable may be closed in an oven door or under a BBQ hood with the following precautions:

#### Cautions for Pro-Series Air Probe:

- Use hot pads or gloves when removing the probe.
  - Do not pull on the cable. Use the molded mini-handle.
  - The cable will withstand 700°F (370°C) and the transition/handle 644°F (340°C).
  - Probe tip itself is rated to 572°F (300°C). Do NOT expose probe tip to flames or coals.
  - Construction is moisture-resistant, but we do not recommend full immersion of the cable.
  - Clean probe by wiping with damp cloth and kitchen cleaner.
- Keep the probe cable away from oven elements, flames, coals, grill or oven racks—all of which can reach temperatures far higher than 700°F (even if an oven is set lower). The probe cable can be damaged at higher temperatures. The inner insulation will melt and the probe will short (displaying "NO PROBE" on the alarm display).
  - When using in outdoor BBQ grills or smokers, avoid pinching the cable between hot surfaces such as a cast metal grill hood without some insulating protection. Use an access hole if available.
  - Avoid repeated kinking or twisting of the probe cable which can break wires.
  - With care, the probe should last a long time. Eventually, you may need to replace it. If the probe becomes damaged, the base unit will flash "NO PROBE" below the temperature display. Affordable replacements are available. Use only ThermoWorks Pro-Series Probes.


www.thermoworks.com  
741 E. Utah Valley Dr.  
American Fork, UT 84003

For service or warranty:  
1-800-393-6434  
1-801-756-7705  
techsupport@thermoworks.com

P-22-010-02-b



More Info

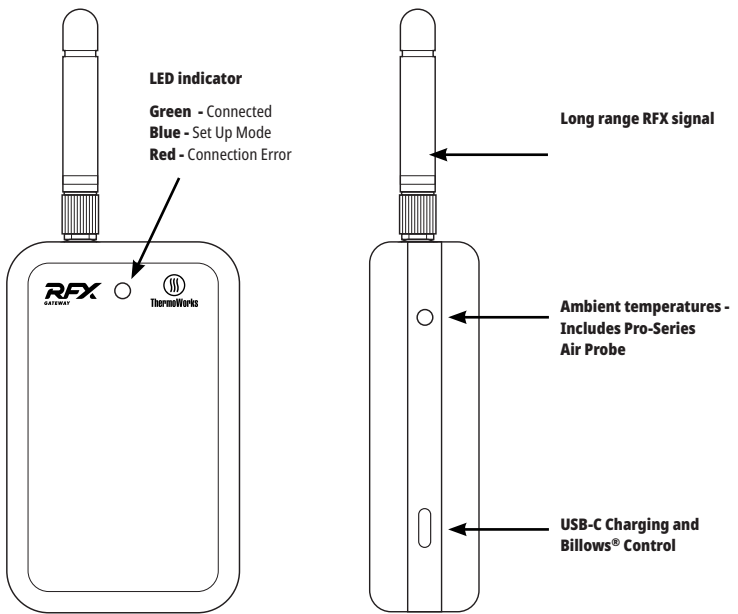

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with the FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

This device complies with Industry Canada Licence-exempt RSSs. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

#### Special Notice

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:\

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

FCC ID: 2A167-TX5601 / IC ID: 22116-TX5601

Contains FCC ID: 2AC7Z-ESP32WROOM32E

Contains IC ID: 21098-ESPWROOM32E